

MADE IN THE USA

DURABLE

- ✓ The hardest board in the industry.
- ✓ Will not ding or dent.
- ✓ Bug, moisture and rot resistant.
- ✓ Contracts 50% less than regular PVC.
- ✓ Best paint adhesion in the market.
- ✓ 100% usable.

WORKABLE

- ✓ No special installation tools needed.
- ✓ Sands like wood.
- ✓ Every piece has exact thickness.
- ✓ Pre-sanded for best paint adhesion and installation.
- ✓ Can be shaped with heat.

ECONOMICAL

- ✓ Nothing to cull. All boards 100% ready to use.
- ✓ Most cost-effective porch board.
- ✓ One coat of paint bonds in days not weeks like Free Foam PVC.
- ✓ Less labor & scrap at the end of the job.

Get more information about **CELUKA Porch Flooring** and the other great KOMA Building materials at:
www.komabuildingproducts.com



MADE IN



USA

DISTRIBUTED BY:

KOMA[®]

BUILDING PRODUCTS

CELUKA

DURABLE • WORKABLE • ECONOMICAL


PORCH FLOORING
THE BEST VALUE IN PVC PORCH FLOORING

KOMA[®]

BUILDING PRODUCTS
Huntsville, AL • 800.330.2239
komabuildingproducts.com



FOR COVERED PORCH APPLICATIONS ONLY

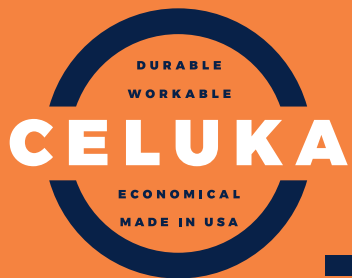

SHEETS
BEAD BOARD
CORNER BOARD
TRIM BOARD

GERMAN ENGINEERED, MADE IN THE USA

CELUKA is the best value in durable porch flooring.

Your customers will enjoy a porch that's **easy to maintain** and will not rot, split, buckle or swell – even in the harshest of conditions.

Only for covered porch applications, this **reversible** porch board is **smooth milled** or **wood grain** surfaced.

CELUKA Porch Flooring is typically less expensive than hard woods and competitive PVC offerings, and delivers the hardest, most durable, and longest-lasting porch surface on the market.

CELUKA extrusion process creates the **most exacting thicknesses ever manufactured**. Your customer will receive material that's defect free and virtually **100% useable on delivery**.

Pre-sanded and ready for paint, providing you unlimited decorative options for today's discerning customers.

DURABLE • WORKABLE • ECONOMICAL

CELUKA

• PORCH FLOORING •


SPECIFICATIONS

- ✓ Exact 3/4" thickness
- ✓ Tongue + groove
- ✓ Pre-sanded and ready to install
- ✓ No paint prep
- ✓ UV-stabilized to reduce fading
- ✓ 8', 10', 12', 16' lengths
- ✓ 12" + 16" O.C. installation
- ✓ Net thickness: 3/4"
- ✓ Net width: 3-1/2"
- ✓ Net face width: 3-1/8"
- ✓ Reversible surfaces

INDIVIDUAL BOARD DIMENSIONS



THE CELUKA EXTRUSION PROCESS



CELUKA is cut with a precision die and bathed in temperature-controlled water for exact thickness and unbelievable durability, every time.

KOMA
BUILDING PRODUCTS



REVERSIBLE, READY-TO-PAINT SURFACE:
SMOOTH MILLED or WOOD GRAIN